

**VERIFY THE CONTENTS INSIDE PACKAGE BOX**

The package should contain the items plus NAS-7103. If any item is missing or damaged, please contact the seller immediately.

**NAS-7103**

**Quick Installation Guide**

**USB2.0 Cable (TYPE B)**

**HDD Screw x 4**

**Power Adapter**

**CD-ROM**

**Brackets**


**RJ-45 Cable**

**Case Screw x 2**

**Note :** If any of above items are missed or damaged, please contact your local dealer for support.

**STEP 1 : Hardware Installation**

1-1. Loosen the screws on the bottom of the case.

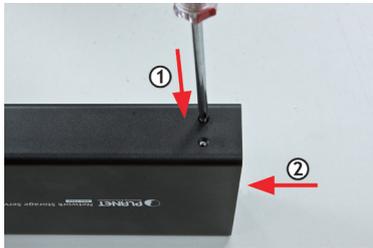

1-2. Place the HDD on the tray.



1-3. Secure the HDD with the HDD screws at both ends.




1-4. Push the tray back into the case and tighten the bottom screws.



**STEP 2 : Firmware Installation**

For the first time installation or New HDD installation.

2-1. Device installation

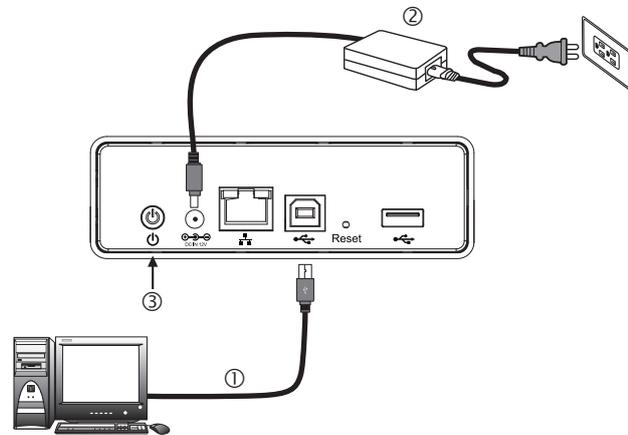


2-2. Follow the steps below for the first time HDD installation

Steps	Description
①	Connect NAS-7103 and a PC with USB2.0 Cable (TYPE B).
②	In the CD along with the product, run " <b>NAS Config.exe</b> " to search and select the device.
③	Click " <b>Browse</b> " and select the firmware file, Click <b>Upgrade</b> button to install firmware.


**Note :**

1. Please do not connect computer with RJ-45 Ethernet cable and USB2.0 (TYPE B) cable at the same time.

2. Your NAS-7103 will require to store firmware and some basic information to your newly installed HDD. If you'd replace a new HDD to the NAS-7103, please follow the steps above again to keep the information for NAS-7103.



**STEP 3 : Access Your NAS-7103 through Network**

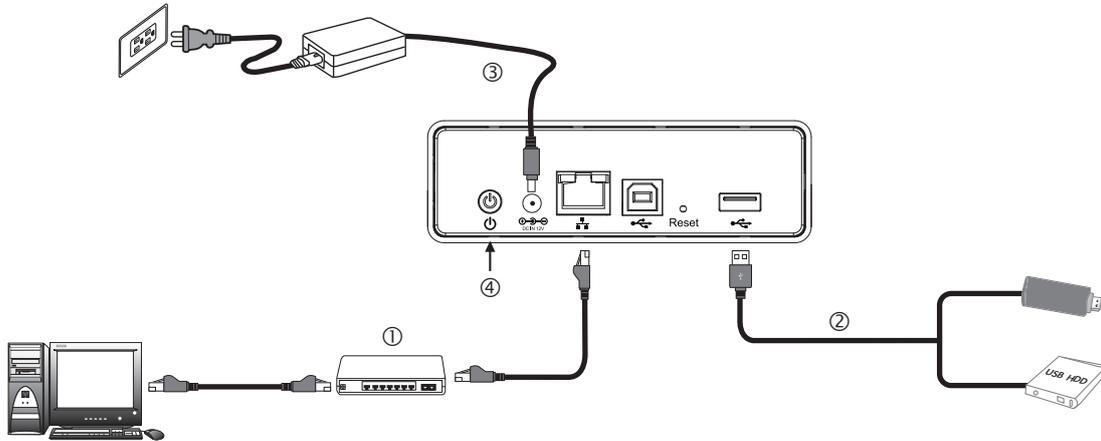

DHCP Client PC or IP:192.168.0.x

Steps	Description
①	Connect NAS-7103 and a Switch, Hub, Router, or computer with RJ-45 Ethernet cable.
②	[Optional] Connect USB storage device(s) to this device with USB cable(s). NAS-7103 can automatically mount the USB devices connected.
③	Connect the power supply to NAS-7103.
④	Press the "Power button" to turn on NAS-7103. NAS-7103 will be ready to use when the blue LED lights up steady.

**STEP 4 : Web Management**

1. Install "NAS Finder" for Windows utilit from the CD.
  2. Please go to Start → Program → PLANET → NAS-7103 → NAS Finder. And click on Refresh button to find your NAS-7103 in the network. The NAS Finder will list the NAS-7103 connected in the Ethernet Network with its Model Namd and IP address.
  3. [DHCP server available in the Network] Double click on the selected item and the program should automatically access the NAS-7103's Web administration page from your default browser.
  4. [DHCP server not available in the Network] Lanuch Web Browser and key in the default IP address of the NAS-7103. If there is no DHCP server in the network, your NAS-7103 will use IP address **192.168.0.20** as its default. Please configure your PC to the same IP subnet as well.
  5. As soon as the Web browser start up, NAS-7103 will prompt for User name and Password. Please key in "**admin**" for both.
  6. You may now start to configure your NAS-7103 such as Share Folder, Network Configuration, User Management and so on.
- For more about your configuration, please also refer to the CD-ROM manual.

