

Thank you for purchasing PLANET 12/24-Port 802.3at High Power PoE Injector Hub.

- HPOE-1200G: 12-Port 802.3at Gigabit High Power PoE Injector Hub
- HPOE-2400G: 24-Port 802.3at Gigabit High Power PoE Injector Hub

Unless model number is specified, the term "**PoE Injector Hub**" in the following sections means the series of the products.

## 1. Package Contents

The box should contain the following items:

- High Power PoE Injector Hub x 1
- Quick Installation Guide x 1
- User's Manual CD x 1
- Power Cord x 1
- Rubber Feet x 4
- Two rack-mounting brackets with attachment screws x 1 (set)

If any item is found missing or damaged, please contact your local reseller for replacement.

- 1 -

Please note that the PoE Injector Hub is configured through an Ethernet connection, and make sure the manager PC must be set on the same **IP subnet address**, for example, the default IP address of the PoE Injector Hub is **192.168.0.100** (the factory-default IP address), then the manager PC should be set at 192.168.0.x (where x is a number between 1 and 254, except 100), and the default subnet mask is 255.255.255.0.

Enter the default IP address to enable the Web login screen to appear as in Figure 1.

Default IP Address: **192.168.0.100**

Default Account: **admin**

Default Password: **admin**



The following screen is based on HPOE-2400G. For HPOE-1200G, the web screen is the same as HPOE-2400G.

## 2. Requirements

The following equipment is necessary for further management.

Network cables:

Use standard network (UTP) cables with RJ45 connectors.


Subscriber PC is installed with Ethernet NIC (Network Card)

The operating system of subscriber PC uses Windows 98/ME, NT4.0, 2000/2003/XP/Vista, MAC OS9 or later, Linux, UNIX or other platforms compatible with TCP/IP protocols.

## 3. Starting Web Management

You can manage the PoE Injector Hub remotely by having a remote host with Web browser, such as Microsoft Internet Explorer, Netscape Navigator or Mozilla Firefox.

PC / Workstation  
with IE or Netscape Browser

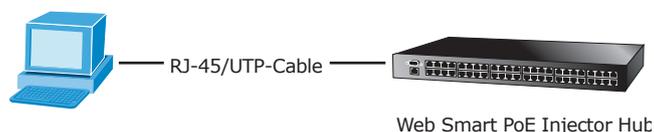

- 2 -



Figure 1. Web Login Screen of PoE Injector Hub

After entering the user name and password in login screen. The web main screen appears as in Figure 2.

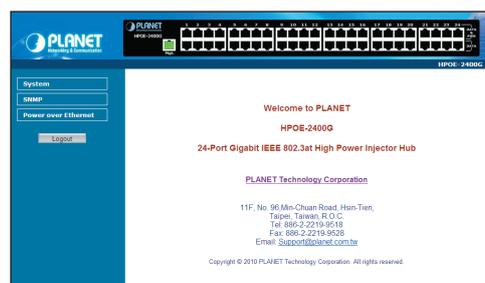


Figure 2. Web Main Screen of HPOE-2400G



For security reason, please change and memorize the new password after this first setup.

- 3 -

- 4 -

## PoE Injector Hub

HPOE-1200G / HPOE-2400G

[www.PLANET.com.tw](http://www.PLANET.com.tw)

12/24-Port **802.3at PoE**  
Injector Hub



**PLANET Technology Corp.**

2010-AF0260-001



### 4. When IP Address has been changed or password has been forgotten

To reset the IP address to the default IP Address "192.168.0.100" and the user name / password to factory default mode, press the hardware reset button for about 8 seconds. After the device is rebooted, you can login the management Web interface within the same subnet of 192.168.0.xx and default user name / password.



Hardware Reset button

### 5. Customer Support

Thank you for purchasing PLANET products. You can browse our online FAQ resource at the PLANET Web site first to check if it could solve your issue. If your need more support information, please contact PLANET switch support team.

PLANET online FAQ:

<http://www.planet.com.tw/en/support/faq.php?type=2>

Switch support team mail address:

[support\\_switch@planet.com.tw](mailto:support_switch@planet.com.tw)

Copyright © PLANET Technology Corp. 2013.

Contents are subject to revision without prior notice.

PLANET is a registered trademark of PLANET Technology Corp.

All other trademarks belong to their respective owners.